
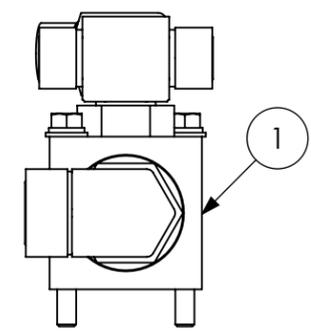
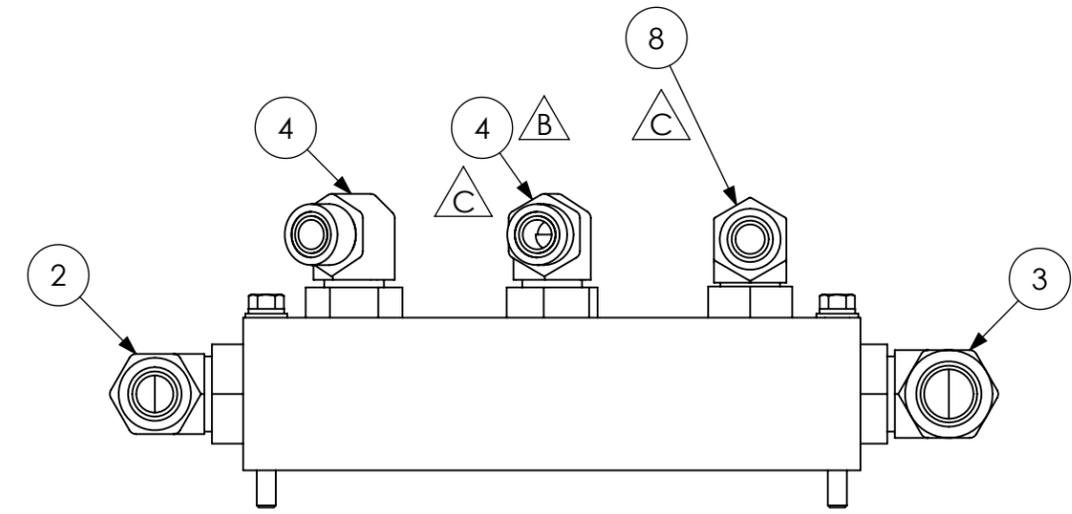
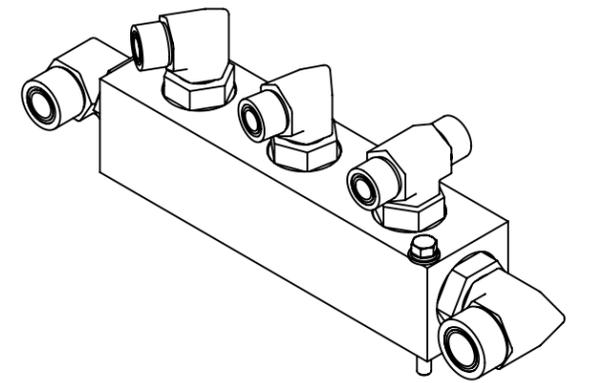


| REVISIONS | | | | | |
|-----------|-----|-----------------|--------|-----|------------|
| ECN | REV | DESCRIPTION | ZONE | BY | DATE |
| 29847 | A | NEW RELEASE | | JDS | 11/20/2023 |
| 30959 | B | UPDATE ADAPTERS | D4 | JDS | 9/6/2024 |
| 31847 | C | UPDATE ADAPTERS | D3, D4 | TWJ | 2/18/2025 |

| ITEM NO. | PART NUMBER | QTY | DESCRIPTION |
|----------|------------------------|-----|---|
| 1 | 1011301 | 1 | MANIFOLD, 3 PORT -12 |
| 2 | FS6801-12-16-NWO-FG | 1 | ADAPTER, ELBOW, 90 DEG, -12 ORFS / -16 O-RING |
| 3 | FS6801-16-16-NWO-FG | 1 | ADAPTER, ELBOW, 90 DEG, -16 ORFS / -16 O-RING |
| 4 | FS6801-10-12-NWO-FG | 2 | ADAPTER, ELBOW, 90 DEG, -10 ORFS / -12 O-RING |
| 5 | 100-5-18-52-5 | 2 | CSHH, 5/16-18 X 3.25, GR5 |
| 6 | 302-5 | 2 | WASHER, LOCK, 5/16 |
| 7 | 300-5 | 2 | WASHER, FLAT, SAE, 5/16 |
| 8 | FS6803-10-10-12-NWO-FG | 1 | ADAPTER, BRANCH TEE, -10 ORFS / -10 ORFS / -12 O-RING |

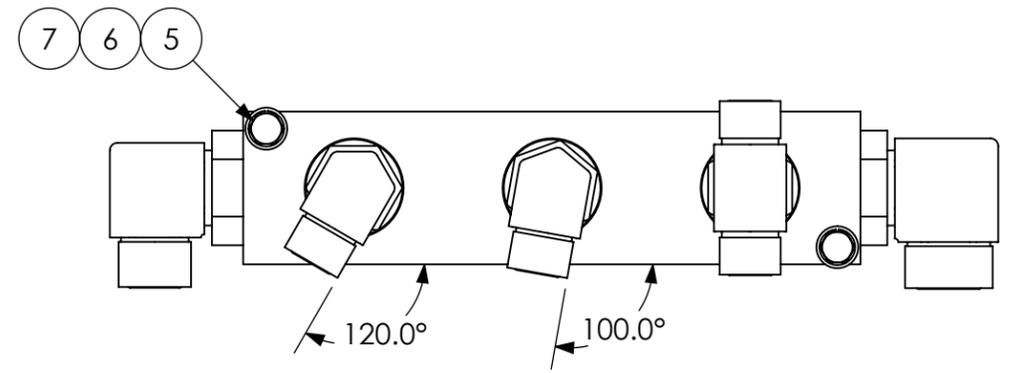

NOTES:

1.

| FINISH PER LEEBOY SPECIFICATION DRAWING 1014877 | | | | | | | | | | | | | | <small>DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED</small> <small>DIMENSIONS APPLY TO FINISHED PART. ROUGH CUTS MUST INCLUDE APPROPRIATE STOCK ALLOWANCE FOR MACHINED PARTS.</small> <small>(REFERENCE DIMENSIONS)</small> <small>REFER TO TABLES FOR GENERAL TOLERANCES</small> | | ST ENGINEERING LEEBOY, dba LEEBOY 500 LINCOLN COUNTY PARKWAY EXT LINCOLNTON, NC 28092 | | APPROVALS DRAWN BY: JDS CHECKED BY: SDD | | DATE 11/20/2023 02/19/2025 | | 1028642 ASSEMBLY, MANIFOLD, RETURN, 8680 | | INFORMATION CONTAINED ON THIS DRAWING IS THE SOLE PROPERTY OF LEEBOY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF LEEBOY IS PROHIBITED. | | PAVER / MULTIPLE SHT 1 OF 1 PART WEIGHT: 7.42 LBS | | REV C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------|--------|--------|--------|--------|---------|---------|---------|-------|-------|-------|--------|--------|---|--|--|--|---|--|----------------------------------|--|--|--|---|--|---|--|-----------------|--|-----------------------------|--|--|--|--|--|--------------|--|---|-------|-------|--------|--------|--------|--------|---------|---------|-------|-------|-------|-------|--------|--------|--|--|---|-------|--------|--------|--------|--------|---------|---------|---|-------|-------|-------|--------|--------|---|--|--|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|------------------|--|------------------------|--|-------------|--|--|--|--|
| <table border="1"> <thead> <tr> <th colspan="14">GENERAL FABRICATION TOLERANCE - INCH</th> <th colspan="2">SURFACE: 250</th> <th colspan="6">GENERAL MACHINING TOLERANCE</th> <th colspan="2">SURFACE: 125</th> </tr> <tr> <th>></th> <th>0.000</th> <th>3.000</th> <th>12.000</th> <th>24.000</th> <th>48.000</th> <th>96.000</th> <th>120.000</th> <th>240.000</th> <th>0.000</th> <th>1.000</th> <th>3.000</th> <th>6.000</th> <th>12.000</th> <th>36.000</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>≤</td> <td>3.000</td> <td>12.000</td> <td>24.000</td> <td>48.000</td> <td>96.000</td> <td>120.000</td> <td>240.000</td> <td>~</td> <td>1.000</td> <td>3.000</td> <td>6.000</td> <td>12.000</td> <td>36.000</td> <td>~</td> <td></td> <td></td> </tr> <tr> <td>±</td> <td>0.015</td> <td>0.031</td> <td>0.063</td> <td>0.094</td> <td>0.125</td> <td>0.188</td> <td>0.250</td> <td>0.500</td> <td>0.005</td> <td>0.010</td> <td>0.015</td> <td>0.031</td> <td>0.063</td> <td>0.094</td> <td></td> <td></td> </tr> </tbody> </table> | | | | | | | | | | | | | | GENERAL FABRICATION TOLERANCE - INCH | | | | | | | | | | | | | | SURFACE: 250 | | GENERAL MACHINING TOLERANCE | | | | | | SURFACE: 125 | | > | 0.000 | 3.000 | 12.000 | 24.000 | 48.000 | 96.000 | 120.000 | 240.000 | 0.000 | 1.000 | 3.000 | 6.000 | 12.000 | 36.000 | | | ≤ | 3.000 | 12.000 | 24.000 | 48.000 | 96.000 | 120.000 | 240.000 | ~ | 1.000 | 3.000 | 6.000 | 12.000 | 36.000 | ~ | | | ± | 0.015 | 0.031 | 0.063 | 0.094 | 0.125 | 0.188 | 0.250 | 0.500 | 0.005 | 0.010 | 0.015 | 0.031 | 0.063 | 0.094 | | | SHEET SCALE: 1:3 | | THIRD ANGLE PROJECTION | | SHT SIZE: B | | | | |
| GENERAL FABRICATION TOLERANCE - INCH | | | | | | | | | | | | | | SURFACE: 250 | | GENERAL MACHINING TOLERANCE | | | | | | SURFACE: 125 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| > | 0.000 | 3.000 | 12.000 | 24.000 | 48.000 | 96.000 | 120.000 | 240.000 | 0.000 | 1.000 | 3.000 | 6.000 | 12.000 | 36.000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ≤ | 3.000 | 12.000 | 24.000 | 48.000 | 96.000 | 120.000 | 240.000 | ~ | 1.000 | 3.000 | 6.000 | 12.000 | 36.000 | ~ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ± | 0.015 | 0.031 | 0.063 | 0.094 | 0.125 | 0.188 | 0.250 | 0.500 | 0.005 | 0.010 | 0.015 | 0.031 | 0.063 | 0.094 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |